





### Dimensions

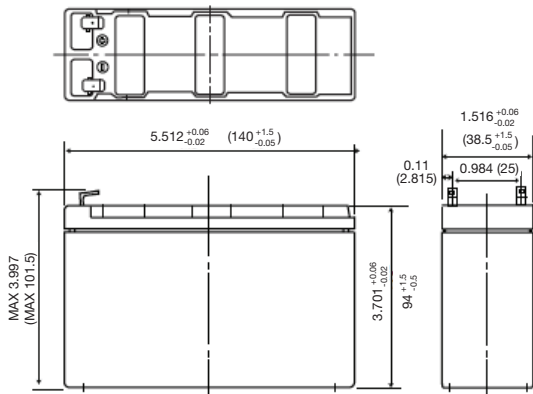

### Duration of Discharge vs. Discharge Current

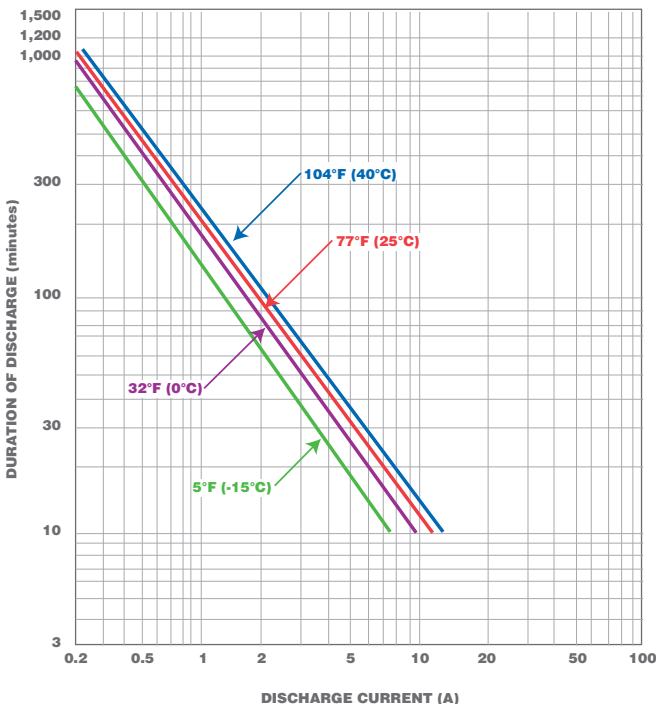

### Features & Benefits

- High quality and reliability
- Exceptional deep discharge recovery
- No corrosive gas generation
- Long service life
- Quick chargeability
- High power density
- Maintenance-free operation

### Specifications

<b>Nominal Voltage:</b>	12V	
<b>Weight:</b>	1.30 kg	
<b>Standard Terminals &amp; Resin</b>	UL94 V-0 Faston 250	
<b>Capacity 77°F (25°C) (9.6V cutoff):</b>	30 min. rate	57W
	15 min. rate	91W
	10 min. rate	120W
	5 min. rate	180W
<b>Internal Resistance:</b>	Fully charged battery	Approx. 35mΩ
<b>Temperature dependency of capacity (20 hour rate):</b>	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
<b>Self discharge 77° (25°C):</b>	Residual capacity after standing 3 mos.	91%
	Residual capacity after standing 6 mos.	82%
	Residual capacity after standing 12 mos.	64%
<b>Charge Method (Constant Voltage):</b>	Initial current	0.6A or smaller
	Trickle use	13.6V to 13.8V (per 12V cell 25°C)
	Control Voltage	(per 12V cell 25°C)

**NOTE:** Case resin flame retardant material is UL94 VO

### Discharge Characteristics 77°F (25°C)

