

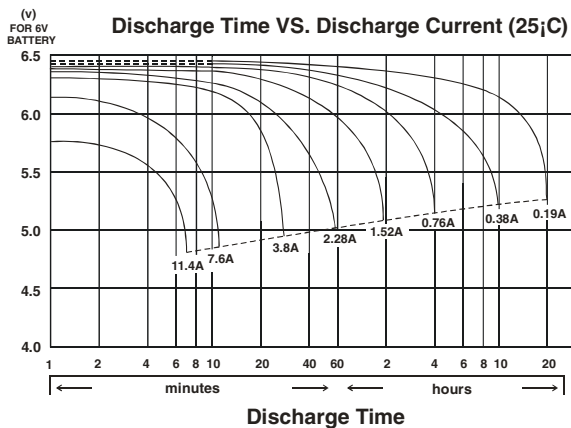


RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION

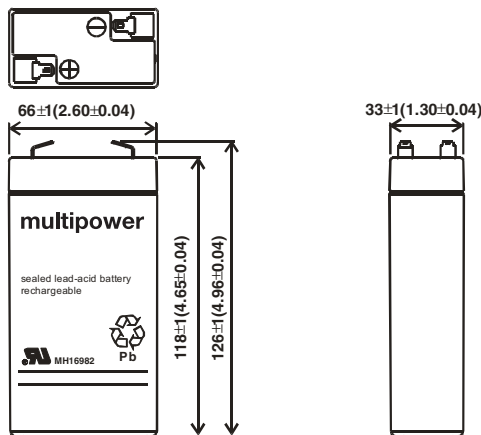

mm(inch)



MP3,8-6

Nominal Voltage (V) 6V

Nominal Capacity

20hour rate (0.19A to 5.25V)	3.8Ah
10hour rate (0.38A to 5.25V)	3.8Ah
5hour rate (0.646A to 5.25V)	3.23Ah
1C (3.8A to 4.80V)	1.71Ah
3C (11.4A to 4.80V)	1.368Ah

Weight 0.735kg(1.62Lbs.)

Internal Resistance (at 1KHz) 18 mΩ

Maximum Discharge Current for 30 seconds : 76A

Maximum Discharge Current for 5 seconds : 152A

Operating Temperature Range

Charge	0°C (32°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Charging Methods at 25°C (77°F)

Cycle use:
 Charging Voltage 7.20 to 7.50V
 Maximum Charging Current: 1.14A

Standby use:
 Float Charging Voltage 6.75 to 6.90V

Life expectancy :

Cycle Use:
 100% depth of discharge 200 cycles
 80% depth of discharge 225 cycles
 50% depth of discharge 500 cycles

Standby Use: 3-5 years

Case Material ABS
 (Option: 94-HB & 94V-0 flame retardant case)

Terminal F1